

**Making operators and their environment safe**  
Innovative solutions to preserve user safety.

- **Parking brake**  
Automatic parking brake with hill start assist to prevent accidents.
- **Joystick with driver presence detection**  
Equipped with a sensor, it automatically detects the presence of the driver to allow movement and reduces the risk of accidents. Works with gloves and in dusty environments.
- **Intuitive and intelligent dashboard**  
All controls are within easy reach, identified with pictograms and colour codes. The operator is alerted to its maintenance, use and safety by means of prioritised notifications.
- **Access to the driver's seat**  
Ergonomic access to the driver's station thanks to Easy Step. This device offers an optimal visibility on the steps for safe descent.

- **Tilt adjustment**  
System that allows you to secure your handling operations during handling operations.
- **Stabilizers**  
Mandatory deployment of the stabilizers when using for more stability and safety.

**OSS - "Operation Safety System"**

Device that accompanies and protects the driver. The driver is informed in real time of any manoeuvres that may expose them to a risk. It simultaneously warns the teams on the site of an operator's inappropriate behaviour and sends the information to the fleet manager. A simple tool for acquiring good behaviour.

**Simplified user's guide videos**  
Reduce Risks supports you in the safe use of our machines



“

*"As an actor in the construction construction, I am looking for machines that are versatile, economic, and that guarantee the safety of the operators on my construction sites."*

Votre concessionnaire



Scan and find out more about [manitou.com](https://manitou.com)

**MANITOU**  
HANDLING YOUR WORLD

This publication describes the versions and configuration possibilities of Manitou products which may differ in equipment. The equipment shown in this brochure may be standard, optional, or not available depending on the version. Manitou reserves the right to change the specifications described and shown at any time without notice. The specifications shown are not binding on the manufacturer. For more details, contact your Manitou dealer. Non contractual document. Presentation and visuals of products are not contractual. The logos and the visual identity of the company are the property of Manitou and cannot be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for reference purposes only. Manitou BFSA - Public limited company with a Board of Directors - Share capital: 39 547 824 euros - 857 802 508 RCS Nantes ©Manitou ©Adobe stock

**RANGE**  
**MT**  
High lift



Scan and find out more about [manitou.com](https://manitou.com)

**MANITOU**  
HANDLING YOUR WORLD



**Manitou is committed to reduce your total cost of ownership (TCO)**

From the design stage and throughout the life cycle, we integrate your total cost of ownership in order to offer you an efficient and economical machine.

● **Easy maintenance**

Easy access to maintenance components, consumables, service points (filters...)

● **Flexible engine regeneration process**

Combined with a time meter and notifications visible from your dashboard. Optimise your regeneration operations without impacting your activity.

● **Reviv'oil system ready**

Filtering the hydraulic oil during each preventive maintenance reduces the risk of breakdowns and the associated costs.

● **2 possible engine powers: 75hp or 100hp**

To best meet your needs on your sites, different engine powers are available.

**STOP & START**

Thanks to the Stop & Start, which automatically shuts down the engine when the machine is stopped, reduce your fuel consumption, noise and CO2 emissions. Fewer hours on the clock, more frequent maintenance intervals and a restart without turning the key.



\*only for 75hp versions

**A robust, high-performance and versatile machine**

Throughout the project, we integrate your total cost of ownership



Turning radius  
**3.65m**

With a short turning radius ranging from 3.65m to 4.01m depending on the model, your high MT model guarantees excellent maneuverability.

Ideally designed for construction and urban renovation, the range corresponds perfectly to the applications of masonry, carpentry, people lifting, truck loading and unloading...



## Performance and versatility at your fingertips

Manitou telescopic handlers are real tool carriers in which you can easily connect the Manitou approved attachment specifically adapted to your application

| Winch                                                                                                                                | General purpose bucket                                                                                                           | 4 in 1 Bucket                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Perfect for moving vertically suspended loads as a mobile or tower crane.                                                            | This bucket is dedicated to all construction applications to move bulk material with a maximum density of 2100kg/m3.             | Multifunctional bucket: material handling material handling, rear counter blade for leveling and sides with teeth for handling cylindrical objects. |
|                                                     |                                                 |                                                                    |
| Extendable Jib                                                                                                                       | Roofer platform                                                                                                                  | Big Bag handler                                                                                                                                     |
| Facilitates the precise placement of suspended loads thanks to a 15°/15° rotation of its arm controlled by the machine's hydraulics. | Approved for three operators, its «spiked» shape allows easy access to the work area and safe and to operate in complete safety. | Equipped with 4 welded retainers, this attachment limits the risk of bags falling.                                                                  |
|                                                   |                                               |                                                                  |

**ATTACHMENT SYSTEM  
SIMPLE AND PROVEN**  
With the Manitou carriage, you can attach and detach your attachments, safely, easily and in a matter of a few seconds.

**ECS : EASY CONNECT SYSTEM**  
As standard, this system allows the hydraulic line to be decompressed in seconds, to allow the simple and quick change of hydraulic attachment.

**HYDRAULIC LOCKING SYSTEM**  
Optional hydraulic locking allows a non-hydraulic attachment to be changed and secured without leaving the machine.

**14m à 18m** Max. Working height

**4t** Max. Capacity

**up to 13m** Max. outreach

**3** steering modes



### Flexibility and security of movements

The slowing down of hydraulic movements at the end of stroke offers precision and safety of operations.

**Affichage intuitif**  
22 langues



**Pictogrammes universels**  
Pour une prise en main rapide



**Easy Step**  
Une visibilité optimale et sécurisée lors de la montée et de la descente du poste de conduite



**Fiches d'utilisation simplifiées**  
Disponibles dans chaque machine

## Why choose the High lift MT range?

Machines that are easy to use, efficient and robust machines for your work sites! The MT High range allows you to carry out your construction work in complete safety. Equipped with a wide range of attachments, these telehandlers offer a versatility on the market.

Adapted to all-terrain areas and equipped with stabilizers, discover exceptional performance to help increase productivity and efficiency. These machines will be your best asset on your construction sites! The perfect combination between profitability, safety, and reduction of your TCO !



**Optimal stabilization**  
Larger stabilisers for better frontal and lateral side stability.

**Compact engine cover**  
The compactness of the engine hood offers optimal visibility for safety.

**Boost your operations**  
Fast and combined movements to increase productivity and reduce consumption.

Repairable engine cover. Highly resistant to shock and vibration

**2 choices of engine power**  
**75hp or 100hp**

**Ground clearance**  
**37 cm**  
High off-road performance

### Cost of transport reduced







### SLINGING/STOWING

Slinging and stowing points Identified and accessible at the front and rear of the machine to secure your transport and logistic operations. 1-point slinging machine



### All terrain

The design of the chassis, with ground clearance and tilt adjustment, guarantee excellent behaviour on on all kinds of grounds.

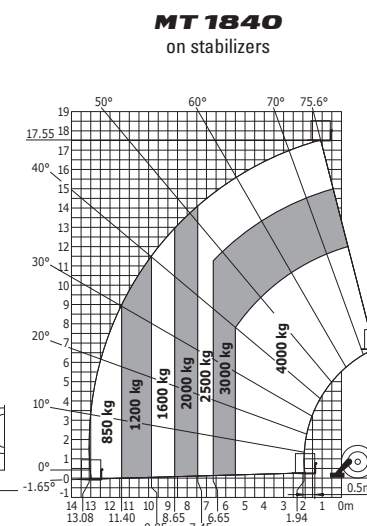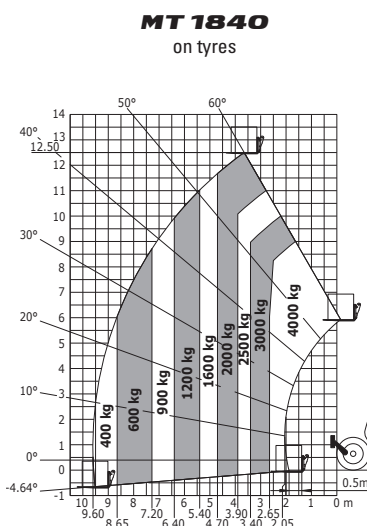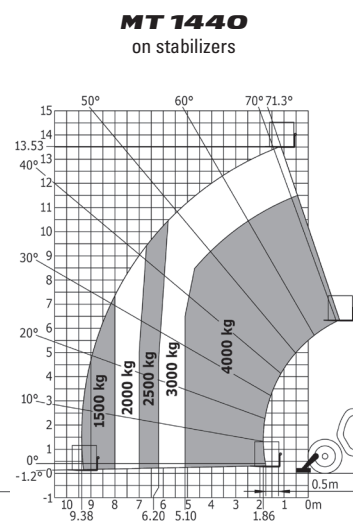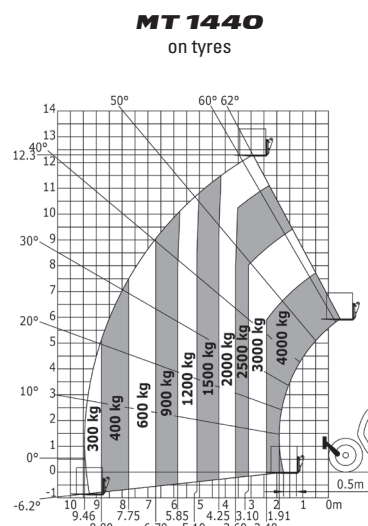

### A tailor-made solution adapted to your needs

Discover a wide range of options. For access to all options, ask your Manitou dealer.



**Hydraulic line**  
Allows compatibility with all Manitou hydraulic attachments.



**Speed 35 km/h\*.**  
Boost your performance and your travels on the road.

\*only available on 100hp versions



**Radio command**  
To control the movements of the boom from the ground

**2 finishes possible**  
Manitou offers you two levels of finish to meet your needs

**Standard**

**Comfort**